



Bottom view

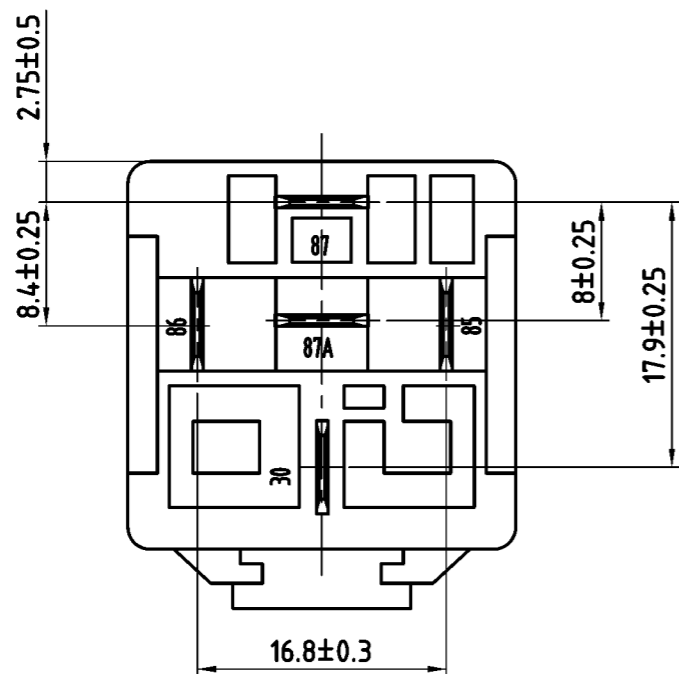

Wiring Diagram

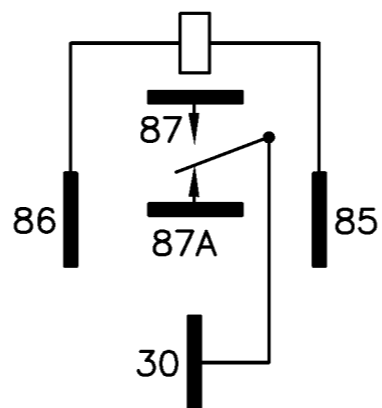

Nominal Voltage	12 Vd.c.
Coil Resistance	85±10% Ω
Pick-up Voltage	≤7.8 Vd.c.(20℃)
Drop-out Voltage	≥1.2Vd.c.(20℃)
Contact Material	AgSnO ₂ In ₂ O ₃
Contact voltage drop	≤100 mV (13.5 Vd.c., 10 A)
Contact Rating	NO/NC 40/30A, 14Vd.c. (Res. load)
Electrical life	1X10 ⁵
Mechanical life	1X10 ⁷
Insulation Resistance	≥100 MΩ, 500 Vd.c.
Dielectric Strength	500 Va.c., 1 min
Ambient temperature	-40℃~85℃
Cover color	Black
Termination	Plug-in (Metal Shrouded)

Type M4	Date	2007·07·18	PROJECTION 	TITLE M4/012-1Z2G	
	Design	zhuweisi			
Size A3	Check	chenminxiao	SCALE 2:1	DWG.No. P601.002-202	
	Approve	huzhongrui			